


NOTE:  
 1.ELECTRICAL CHARACTERISTICS;  
 1.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 50mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.  
 1.2 CONTACT CURRENT RATING: 5A FOR VBUS PIN; 1.25A FOR VCONN PIN.  
 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.  
 1.4 INSULATION RESISTANCE 100MΩ Min  
 1.5 OPERATING TEMPERATURE: -40°C~85°C  
 2.MECHANICAL CHARACTERISTICS;  
 2.1 MATING FORCE: 5~20 N.  
 2.2 UNMATED FORCE: 8~20N AFTER TEST  
 2.3 DURABILITY: 10,000 CYCLES

TABLE :PIN DEFINE

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A12	GND	B1	GND
A11	RX2+	B2	TX2+
A10	RX2-	B3	TX2-
A9	VBUS	B4	VBUS
A8	SUB1	B5	VCONN
A7	Dn1	B6	
A6	Dp1	B7	
A5	CC	B8	SUB2
A4	VBUS	B9	VBUS
A3	TX1-	B10	SSTXn2
A2	TX1+	B11	SSTXp2
A1	GND	B12	GND

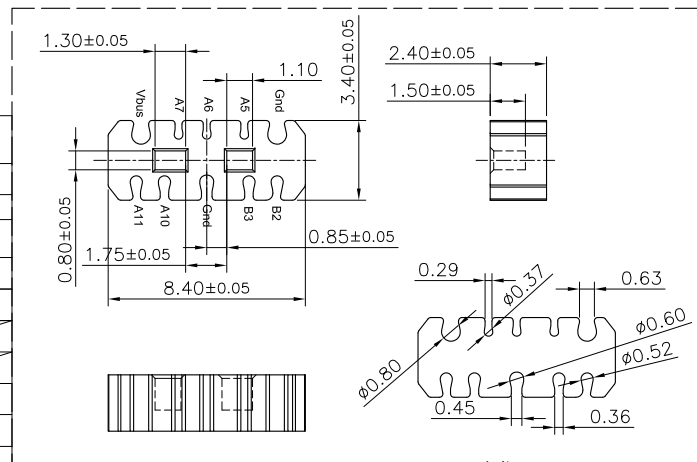

线夹规格 卡位尺寸

NO.	PART NAME	MATERIAL	DESCRIPTION
6			
5	EMI弹片	不锈钢 T=0.10	
4	卡钩	不锈钢 T=0.30	Ni PLATED
3	外壳	不锈钢 T=0.15	Au/Ni PLATED
2	端子	铜合金 T=0.15	GOLD/TIN/Au PLATED
1	胶芯	LCP	UL 94V-0

**HE** 东莞市旭明电子有限公司

REV	DATE	DESCRIPTION	NAME	APPRO.	0 ±0.25	±0.25	DESIGN	
0	18'04/23	NEW	Wyl	Dave	0.0 ±0.20	±0.20	CHECK	
					0.00 ±0.15	±0.15	APPRO.	

TITLE:	拉伸款黑LCP外壳不锈钢镀镍端子镀2U"弯端C-3 C1=10nF R1=56K 加锡			
PART NO.	UCU0080-050	CUSTOMER NO(REV)	1G	UNIT:mm
FILE NAME	1800606-01	SHEET: 1 of 1	SCALE: 1:1	A4