
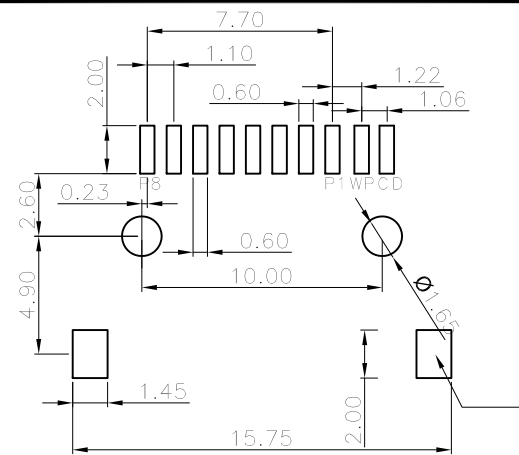
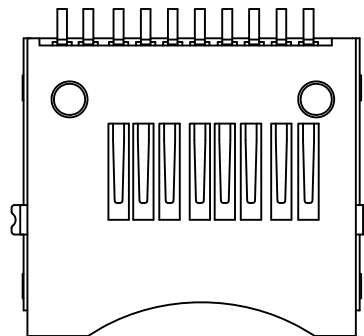


CIRCUIT



Recommended P.C.B Layout(Top Side)

NOTES:

Current Rating: 0.5A AC,DC
 Temperature Range: -20°C~+60°C
 Contact Resistance: 40mΩ max
 Insulation Resistance: 1000M Ω min
 Withstanding Voltage: 500V AC/minute
 Material: LCP UL 94V-0

6			
5			
4	SHELL	SWP	
3	SHELL	STEEL	NICKEL PLATED
2	CONTACT	COPPER ALLOY	G/F PLATED AT CONTACT AREA; TIN PLATED AT SOLDER PIN AREA NICKEL UNDERPLATED OVERALL
1	HOUSING	HI-TEMP PLASTIC	BLACK UL94V-0
NO.	PART NAME	MATERIAL	DESCRIPTION

HE 东莞市旭明电子有限公司

B	18'/10/15	增加塑胶强度, 取消掏料孔		Dave	0	±0.25		
A	18'/04/19	12.05与1.95尺寸变更为参考尺寸	Wyl	Dave	0.0	±0.20	DESIGN	
0	15'/11/08	NEW	Chi	Captain	0.00	±0.15	CHECK	
REV	DATE	DESCRIPTION	NAME	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO.	

TITLE:	TF卡座 贴板 H1.75 L12.05 翘边 黑胶芯LCP 铜壳镀镍			
PART NO.	TFB0003-000	CUSTOMER NO(REV)	1G	UNIT:mm
FILE NAME	151108-10	SHEET: 1 of 1	SCALE: 1:1	A4