

- NOTE:
1. ELECTRICAL CHARACTERISTICS:
 - 1.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 50mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
 - 1.2 CONTACT CURRENT RATING: 5A FOR VBUS PIN; 1.25A FOR VCONN PIN.
 - 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - 1.4 INSULATION RESISTANCE 100MΩ Min
 - 1.5 OPERATING TEMPERATURE: -40°C~85°C
 2. MECHANICAL CHARACTERISTICS:
 - 2.1 MATING FORCE: 5~20 N.
 - 2.2 UNMATED FORCE: 8~20N AFTER TEST
 - 2.3 DURABILITY: 10,000 CYCLES

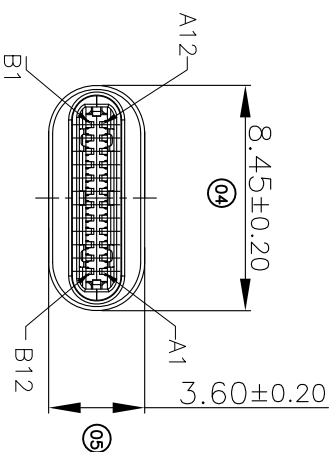


TABLE : PIN DEFINE

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A12	GND	B1	GND
A11	RX2+	B2	TX2+
A10	RX2-	B3	TX2-
A9	VBUS	B4	VBUS
A8	SUB1	B5	VCONN
A7	Dn1	B6	
A6	Dp1	B7	
A5	CC	B8	SUB2
A4	VBUS	B9	VBUS
A3	TX1-	B10	SSTXn2
A2	TX1+	B11	SSTXp2
A1	GND	B12	GND

TABLE:

1020135:外壳镀亮镍
1020137:外壳镀雾镍

6			
5	EMI 弹片	不锈钢 T=0.10	
4	卡钩	不锈钢 T=0.30	NI PLATED
3	外壳	不锈钢 T=0.15	Au/Ni PLATED
2	端子	铜合金 T=0.15	GOLD/TIN/Au PLATED
1	胶芯	LCP	UL 94V-0
NO. PART NAME	MATERIAL	DESCRIPTION	

HE 东莞市旭明电子有限公司

D	20/10/17	新编号号发行	HQ	PAT	0	±0.25	DESIGN	
C	19/09/11	修改图面公差	HQ	LZX	0.0	±0.20	CHECK	
B	19/08/28	图纸增加 (535) 料号	HQ	LZX	0.00	±0.15	APPRO.	
REV	DATE	DESCRIPTION	NAME	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO.	
TITLE:		拉伸款 黑LCP外壳不锈钢镀镍 端子镀2U"弯端C-带IC(客供)芯片+10nF电容						
FILE NAME	USBC0096	SHEET: 1 of 1	SCALE: 1:1	UNIT:mm				