

- NOTE:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 50mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
    - CONTACT CURRENT RATING: 5A FOR VBUS
    - CONTACT CURRENT RATING: 1.25A FOR VCONN PIN.
    - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
    - INSULATION RESISTANCE 100MΩ Min
    - OPERATING TEMPERATURE: -40°C~85°C
  - MECHANICAL CHARACTERISTICS:
    - MATING FORCE: 5~20 N.
    - UNMATED FORCE: 8~20N AFTER TEST
    - DURABILITY: 10,000 CYCLES

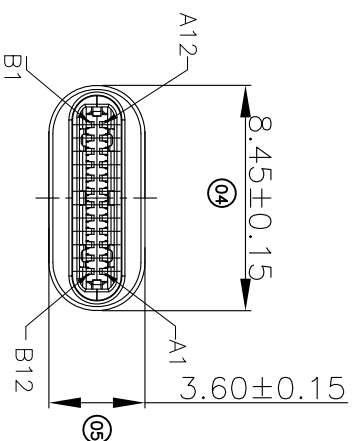


TABLE : PIN DEFINE

PIN	SIGNAL NAME	PIN	SIGNAL NAME
A12	GND	B1	GND
A11	RX2+	B2	TX2+
A10	RX2-	B3	TX2-
A9	VBUS	B4	VBUS
A8	SUB1	B5	VCONN
A7	Dn1	B6	
A6	Dp1	B7	
A5	CC	B8	SUB2
A4	VBUS	B9	VBUS
A3	TX1-	B10	SSTXn2
A2	TX1+	B11	SSTXp2
A1	GND	B12	GND

TABLE:

1020136:外壳镀亮镍
1020138:外壳镀雾镍

NO.	PART NAME	MATERIAL	DESCRIPTION
1	胶芯	LCP	UL 94V-0
2	端子	铜合金	T=0.15 GOLD/TIN/Au PLATED
3	外壳	不锈钢	T=0.15 Au/Ni PLATED
4	卡钩	不锈钢	T=0.30 Ni PLATED
5	EMI弹片	不锈钢	T=0.10
6			

**HE** 东莞市旭明电子有限公司

TITLE: 拉伸款 黑LCP外壳不锈钢镀镍 端子镀2U"弯端C-C带0欧电阻+10nF电容

FILE NAME	SEE TABLE	CUSTOMER NO(REV)	SCALE: 1:1	UNIT:mm
USBC0097				A4

REV	DATE	DESCRIPTION	NAME	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED
D	20/10/17	新编号号发行	HQ	PAT	0 ±0.25
C	19/09/11	修改图面公差	HQ	LZX	0.0 ±0.20
B	19/08/28	图纸上增加 (337) 料号	HQ	LZX	0.00 ±0.15